

PV-AC01-1K

**STANDALONE ACCESS
CONTROL SINGLE DOOR**

Overview

All in one access controller for a single entrance door, support 1000 users with a control device and keyboard input in one function, easy to install, easy to use, Support management card, Easy management, stable performance, quickly identify proximity readers, with short circuit protection application requirements, security guard interference, to meet a variety of automated oce space, industrial and mining enterprises, government agencies, intelligence community, telecom base stations, and other public access entrance touch access controller system.



PV-AC01-1K

STANDALONE ACCESS
CONTROL SINGLE DOOR

KEY FEATURES

- | | |
|---|---|
| › | Wiegand Input |
| › | Doorbell input |
| › | Universal Access:
Card/PIN/Card+PIN, Mobile access |
| › | Storage: 1000 Users |
| › | Door open time: 0-99 sec. |
| › | Anti-tamper alarm |
| › | Mobile app: Smartlife |
| › | Safe & Vandal Resistant & Waterproof |



RFID



Custom PIN Code



IP66



PV-AC01-1K

STANDALONE ACCESS CONTROL SINGLE DOOR

SPECIFICATION

Model	PV-AC01-1K-IP67 Waterproof Touch-Keypad Access Controller
Access modes	Card/PIN/Card + PIN, Mobile Access
Door Open Time	0-99 seconds
Storage capacity	1000 Users
Material	ABS Plastic
Proximity Range	1-10 CM
Frequency	125KHz + 13.56MHz Dual Band
PIN length	3-6 digits
Access Control Interface	Electric lock, Door sensor, Exit button, Door Bell
Lock control	1 Relay, NC/C/NO
Power	AC/DC 12-24V, 100mA
Operating Temperature	-20°~+60°C
Operating Humidity	20%~80%
Dimensions	L113xW72xH20 mm.
Gross Weight	0.165 kg




PV-AC01-1K


STANDALONE ACCESS
CONTROL SINGLE DOOR



Wiring

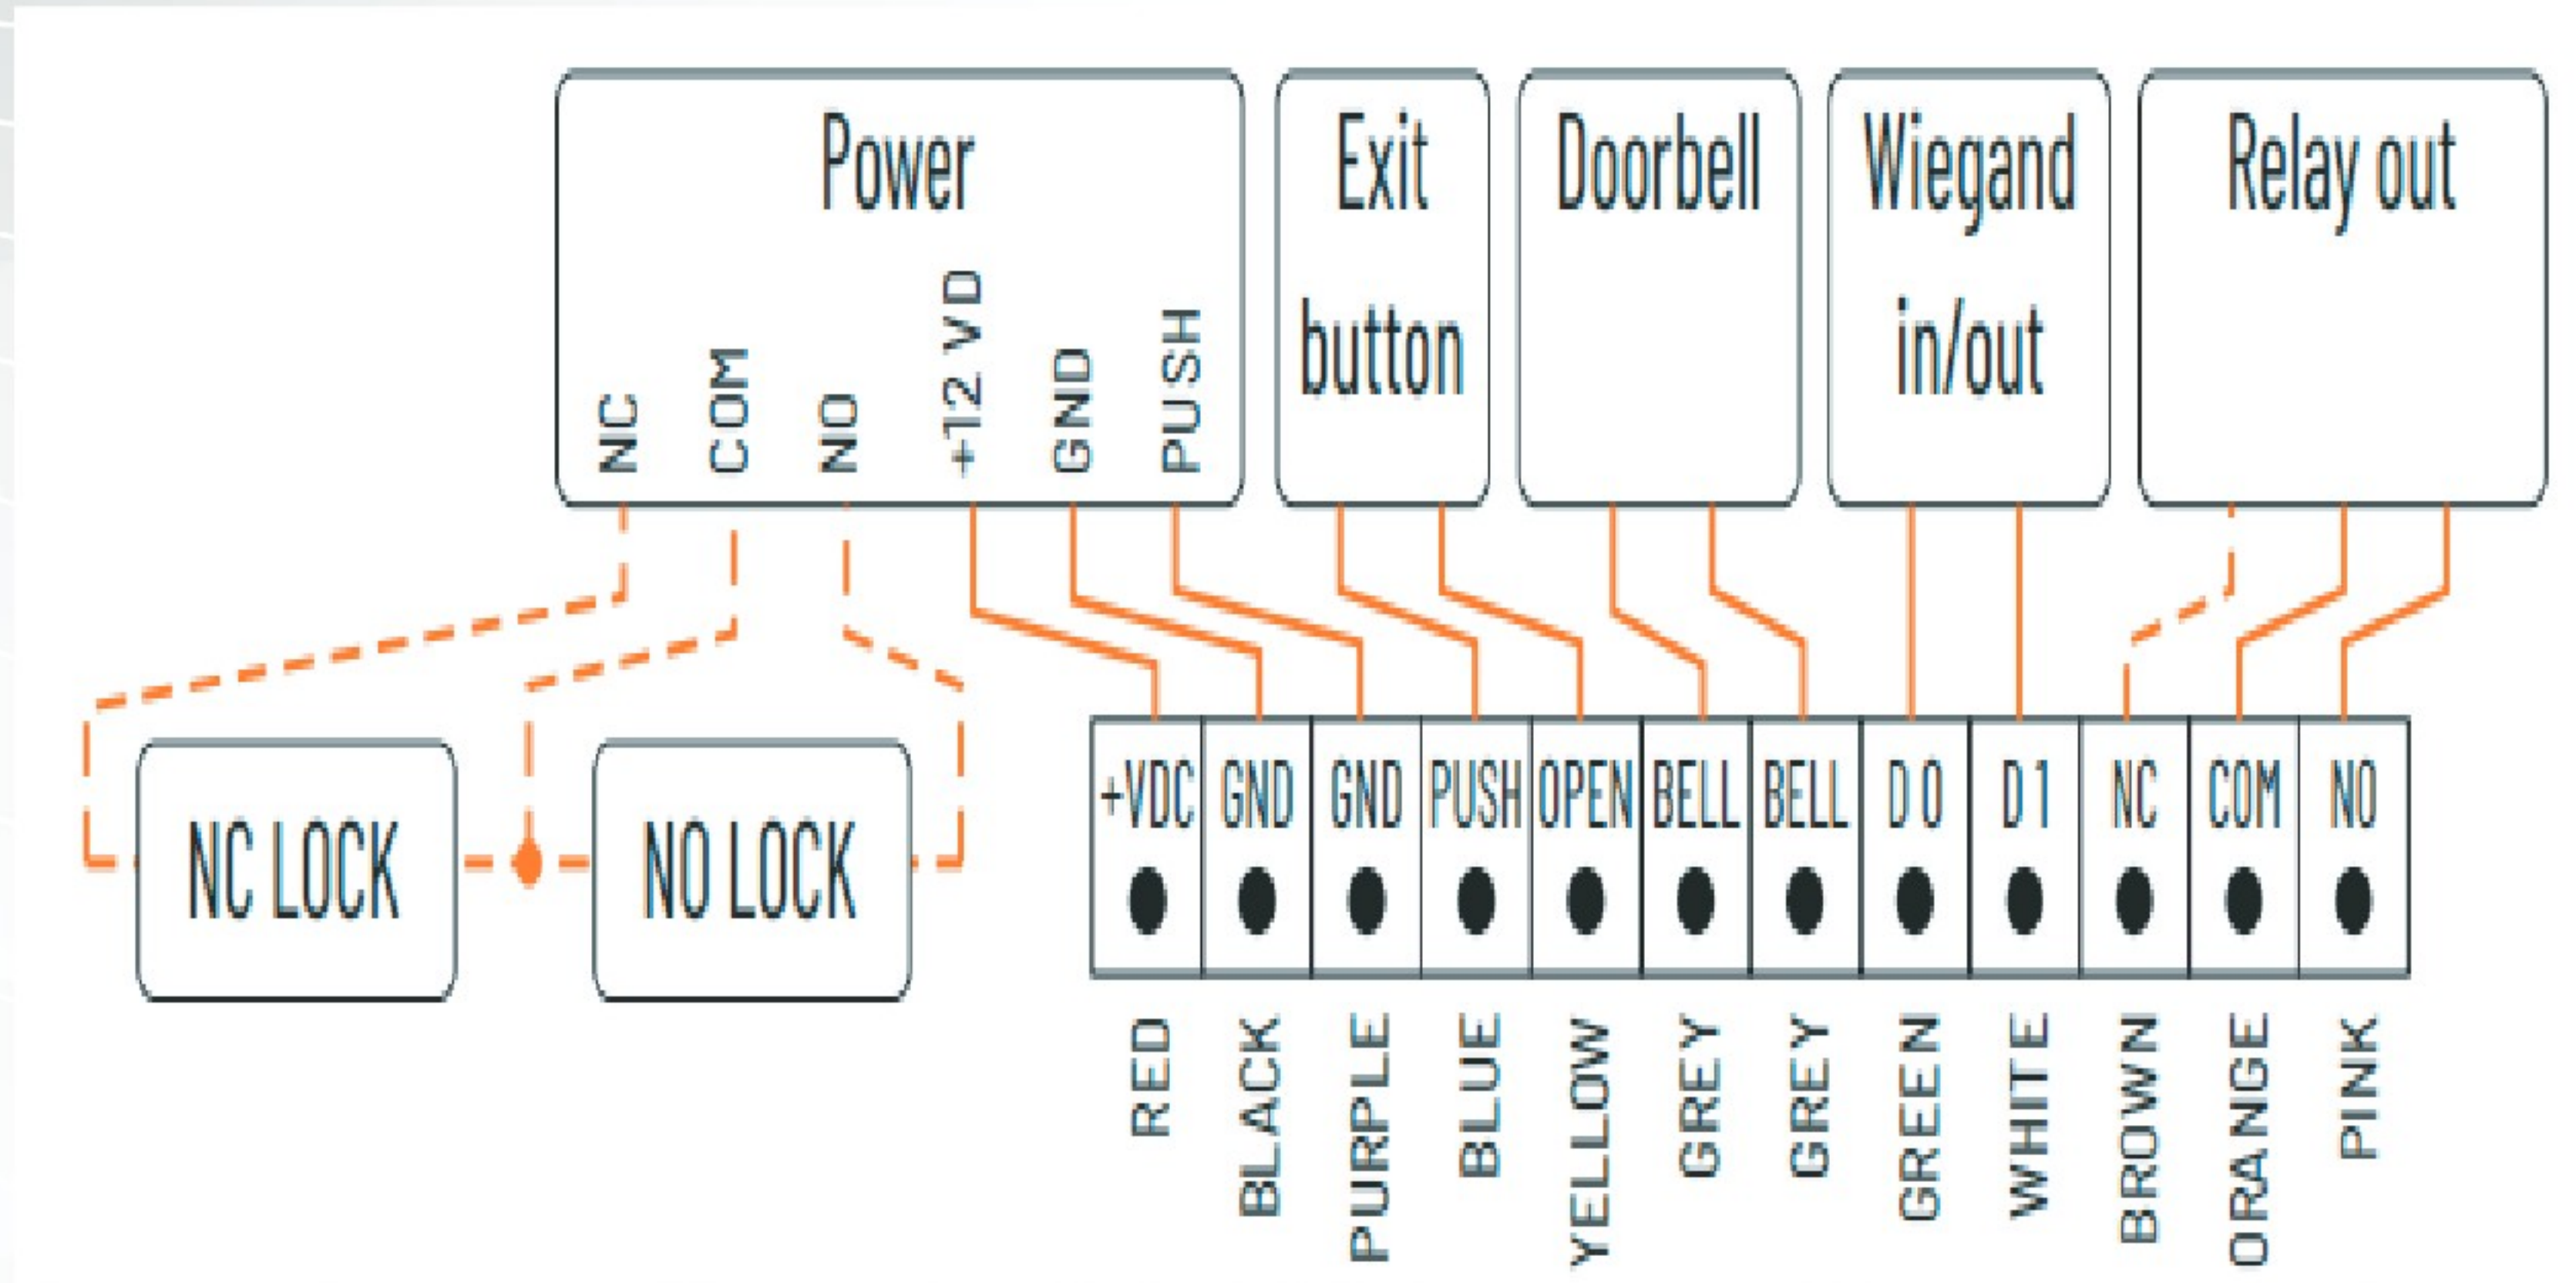

Configurations

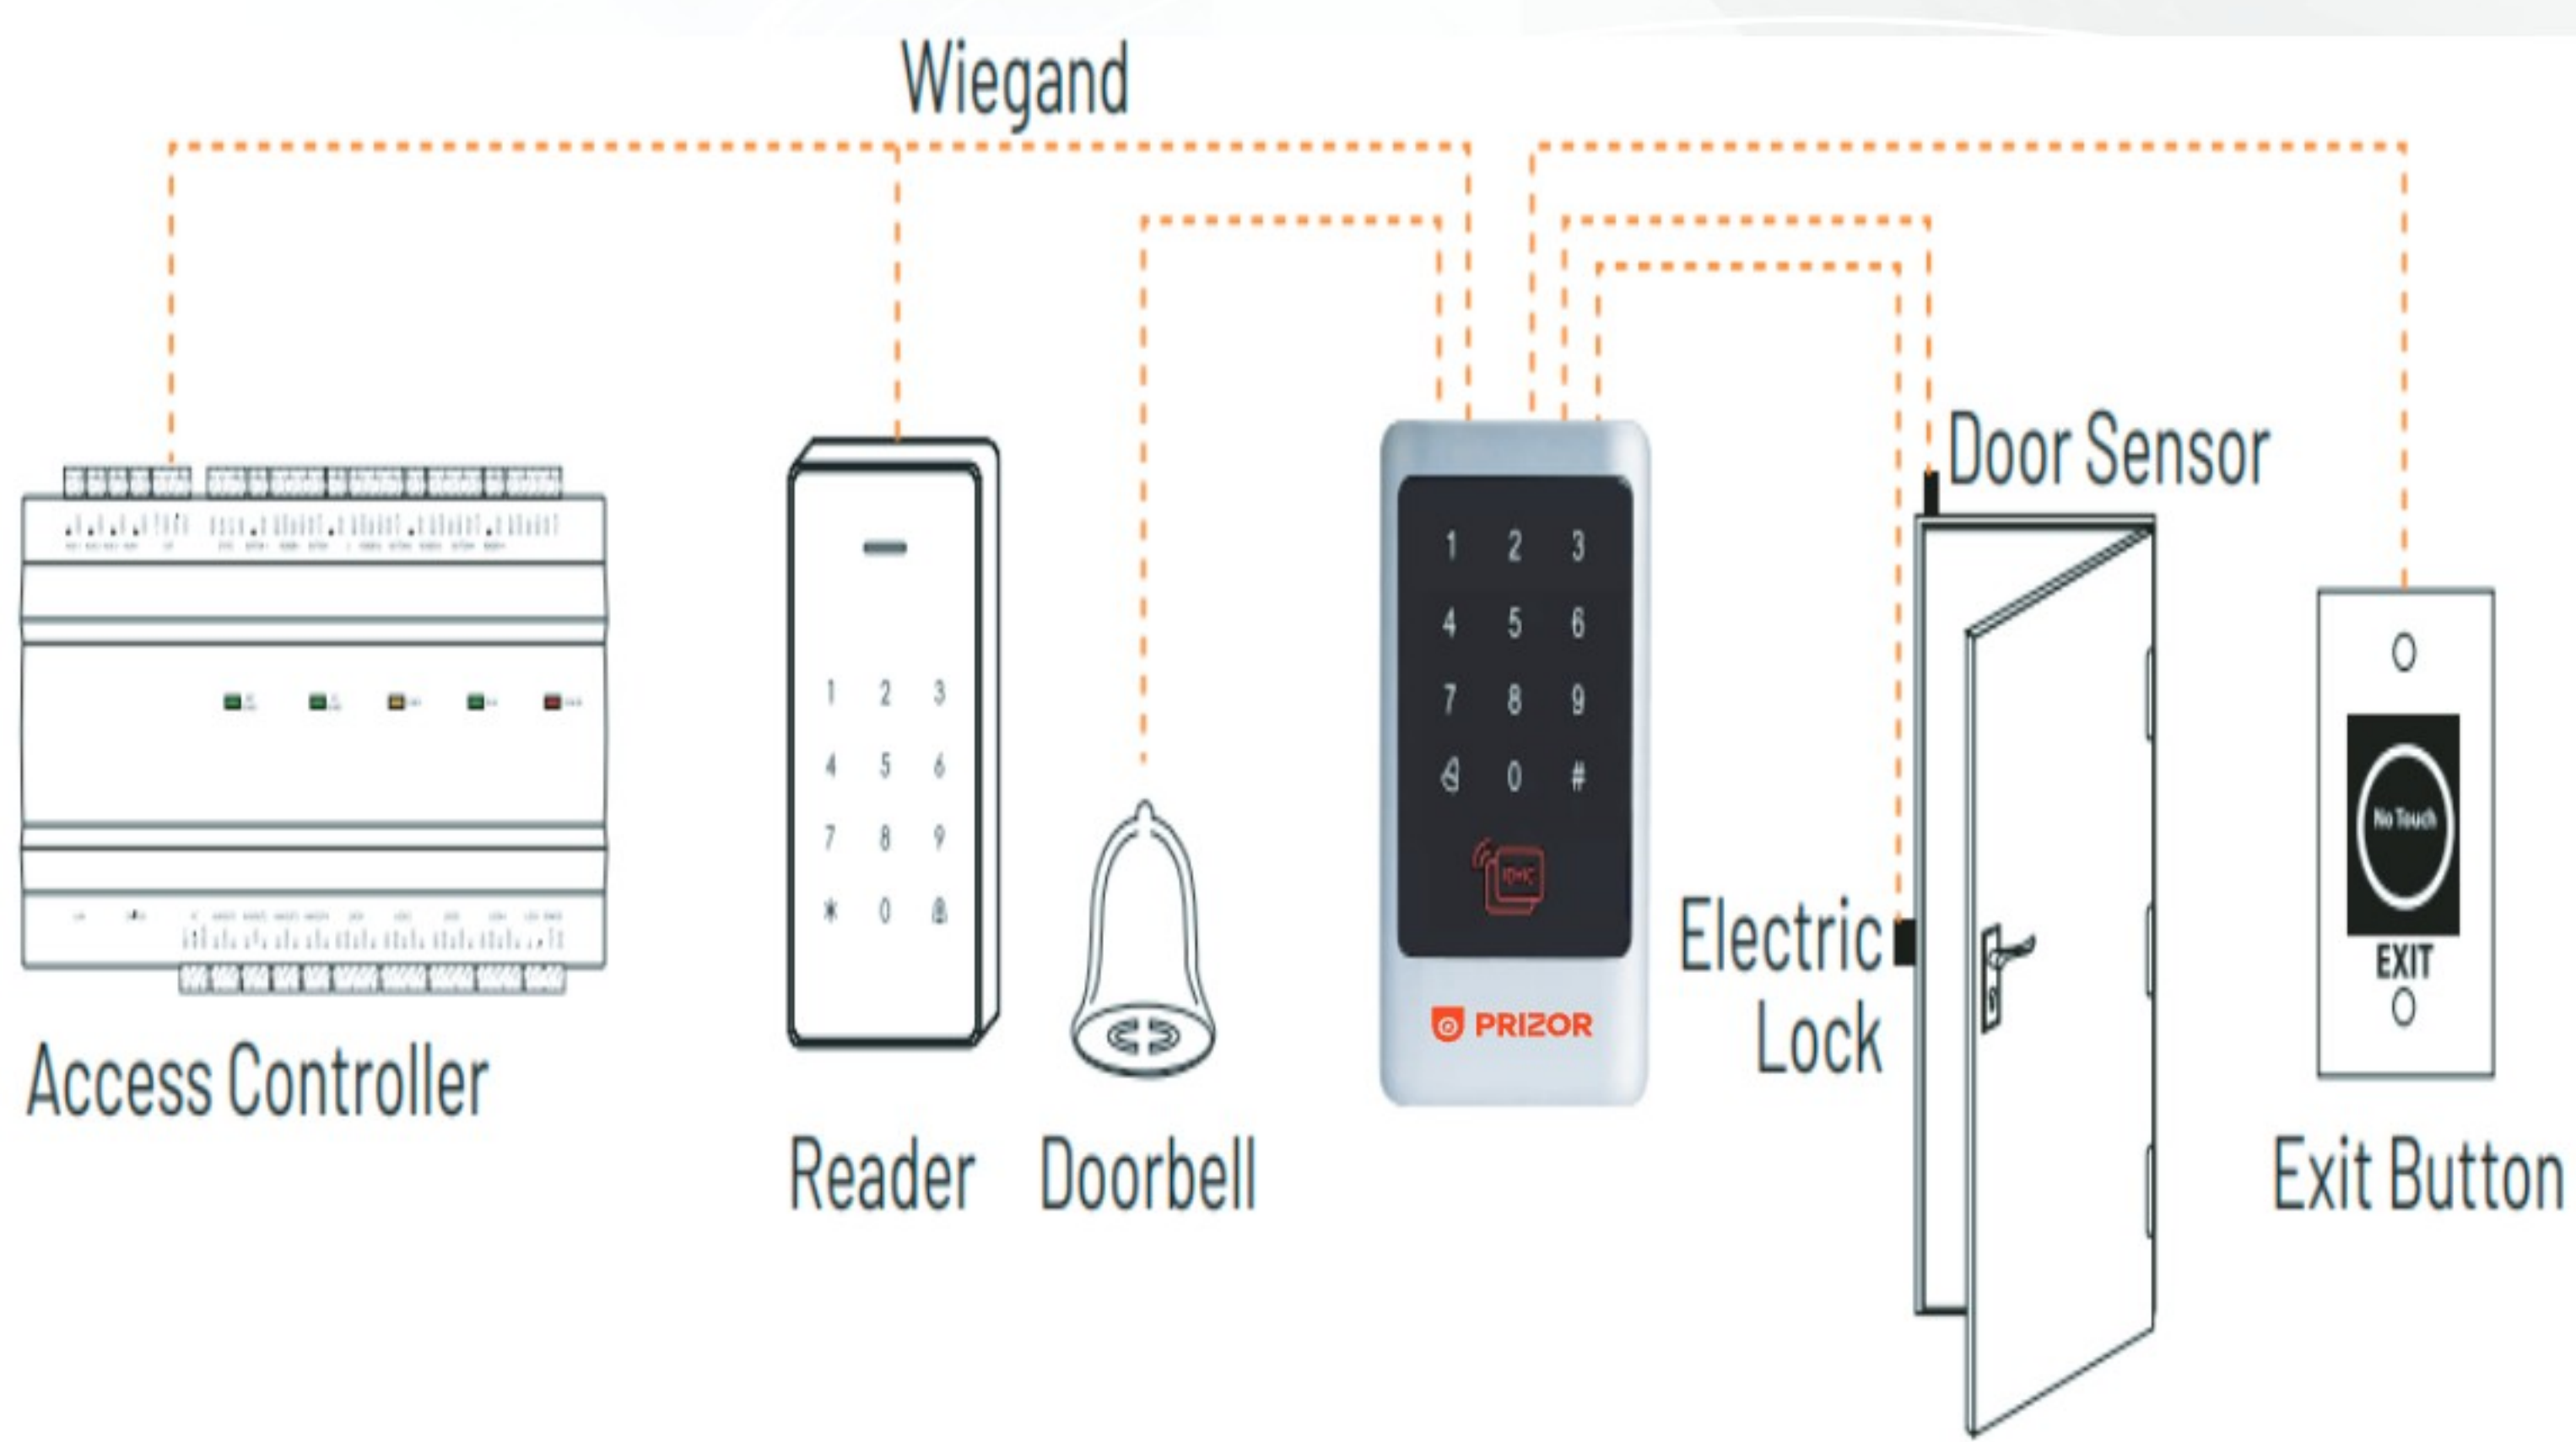

1800-123-3699



www.prizor.in

