

PV-ACM01-1K

STANDALONE ACCESS CONTROL SINGLE DOOR



Overview

All in one Metal Access controller for a single entrance door, support 1000 users with a control device and keyboard input in one function, easy to install, easy to use, Support management card, Easy management, stable performance, quickly identify proximity readers, with short circuit protection application requirements, security guard interference, to meet a variety of automated office space, industrial and mining enterprises, government agencies, intelligence community, telecom base stations, and other public access entrance touch access controller system.



PV-ACM01-1K

STANDALONE ACCESS CONTROL SINGLE DOOR



KEY FEATURES

- › **Wiegand protocols: 26/34**
- › **Wiegand interface: Input/Output**
- › **Doorbell input**
- › **Universal Access: Card/PIN/Card + PIN, Mobile access**
- › **Storage: 1000 Users**
- › **Door open time: 0-99 sec.**
- › **Anti-tamper alarm**
- › **Mobile app: Smartlife**
- › **Safe & Vandal Resistant & Waterproof**



RFID



Custom PIN Code



IP66



PV-ACM01-1K

STANDALONE ACCESS CONTROL SINGLE DOOR



SPECIFICATION

Model	PV-ACM01-1K- IP66 Metal Waterproof Touch-Keypad Access Controller
Access modes	Card/PIN/Card + PIN, Mobile Access
Door Open Time	0-99 seconds
Storage capacity	1000 Users
Material	Metal enclosure
Proximity Range	1-10 CM
Frequency	125KHz + 13.56MHz Dual Band
PIN length	3-6 digits
Access Control Interface	Electric lock, Door sensor, Exit button, Doorbell
Wiegand interface	WG26/34, Input/Output
Lock control	1 Relay, NC/C/NO
Power	AC/DC 12-24V, 100mA
Operating Temperature	-20°~+60°C
Operating Humidity	20%~80%
Dimensions	L115xW75xH20 mm.
Gross Weight	0.356 kg




PV-ACM01-1K

STANDALONE ACCESS CONTROL



Wiring

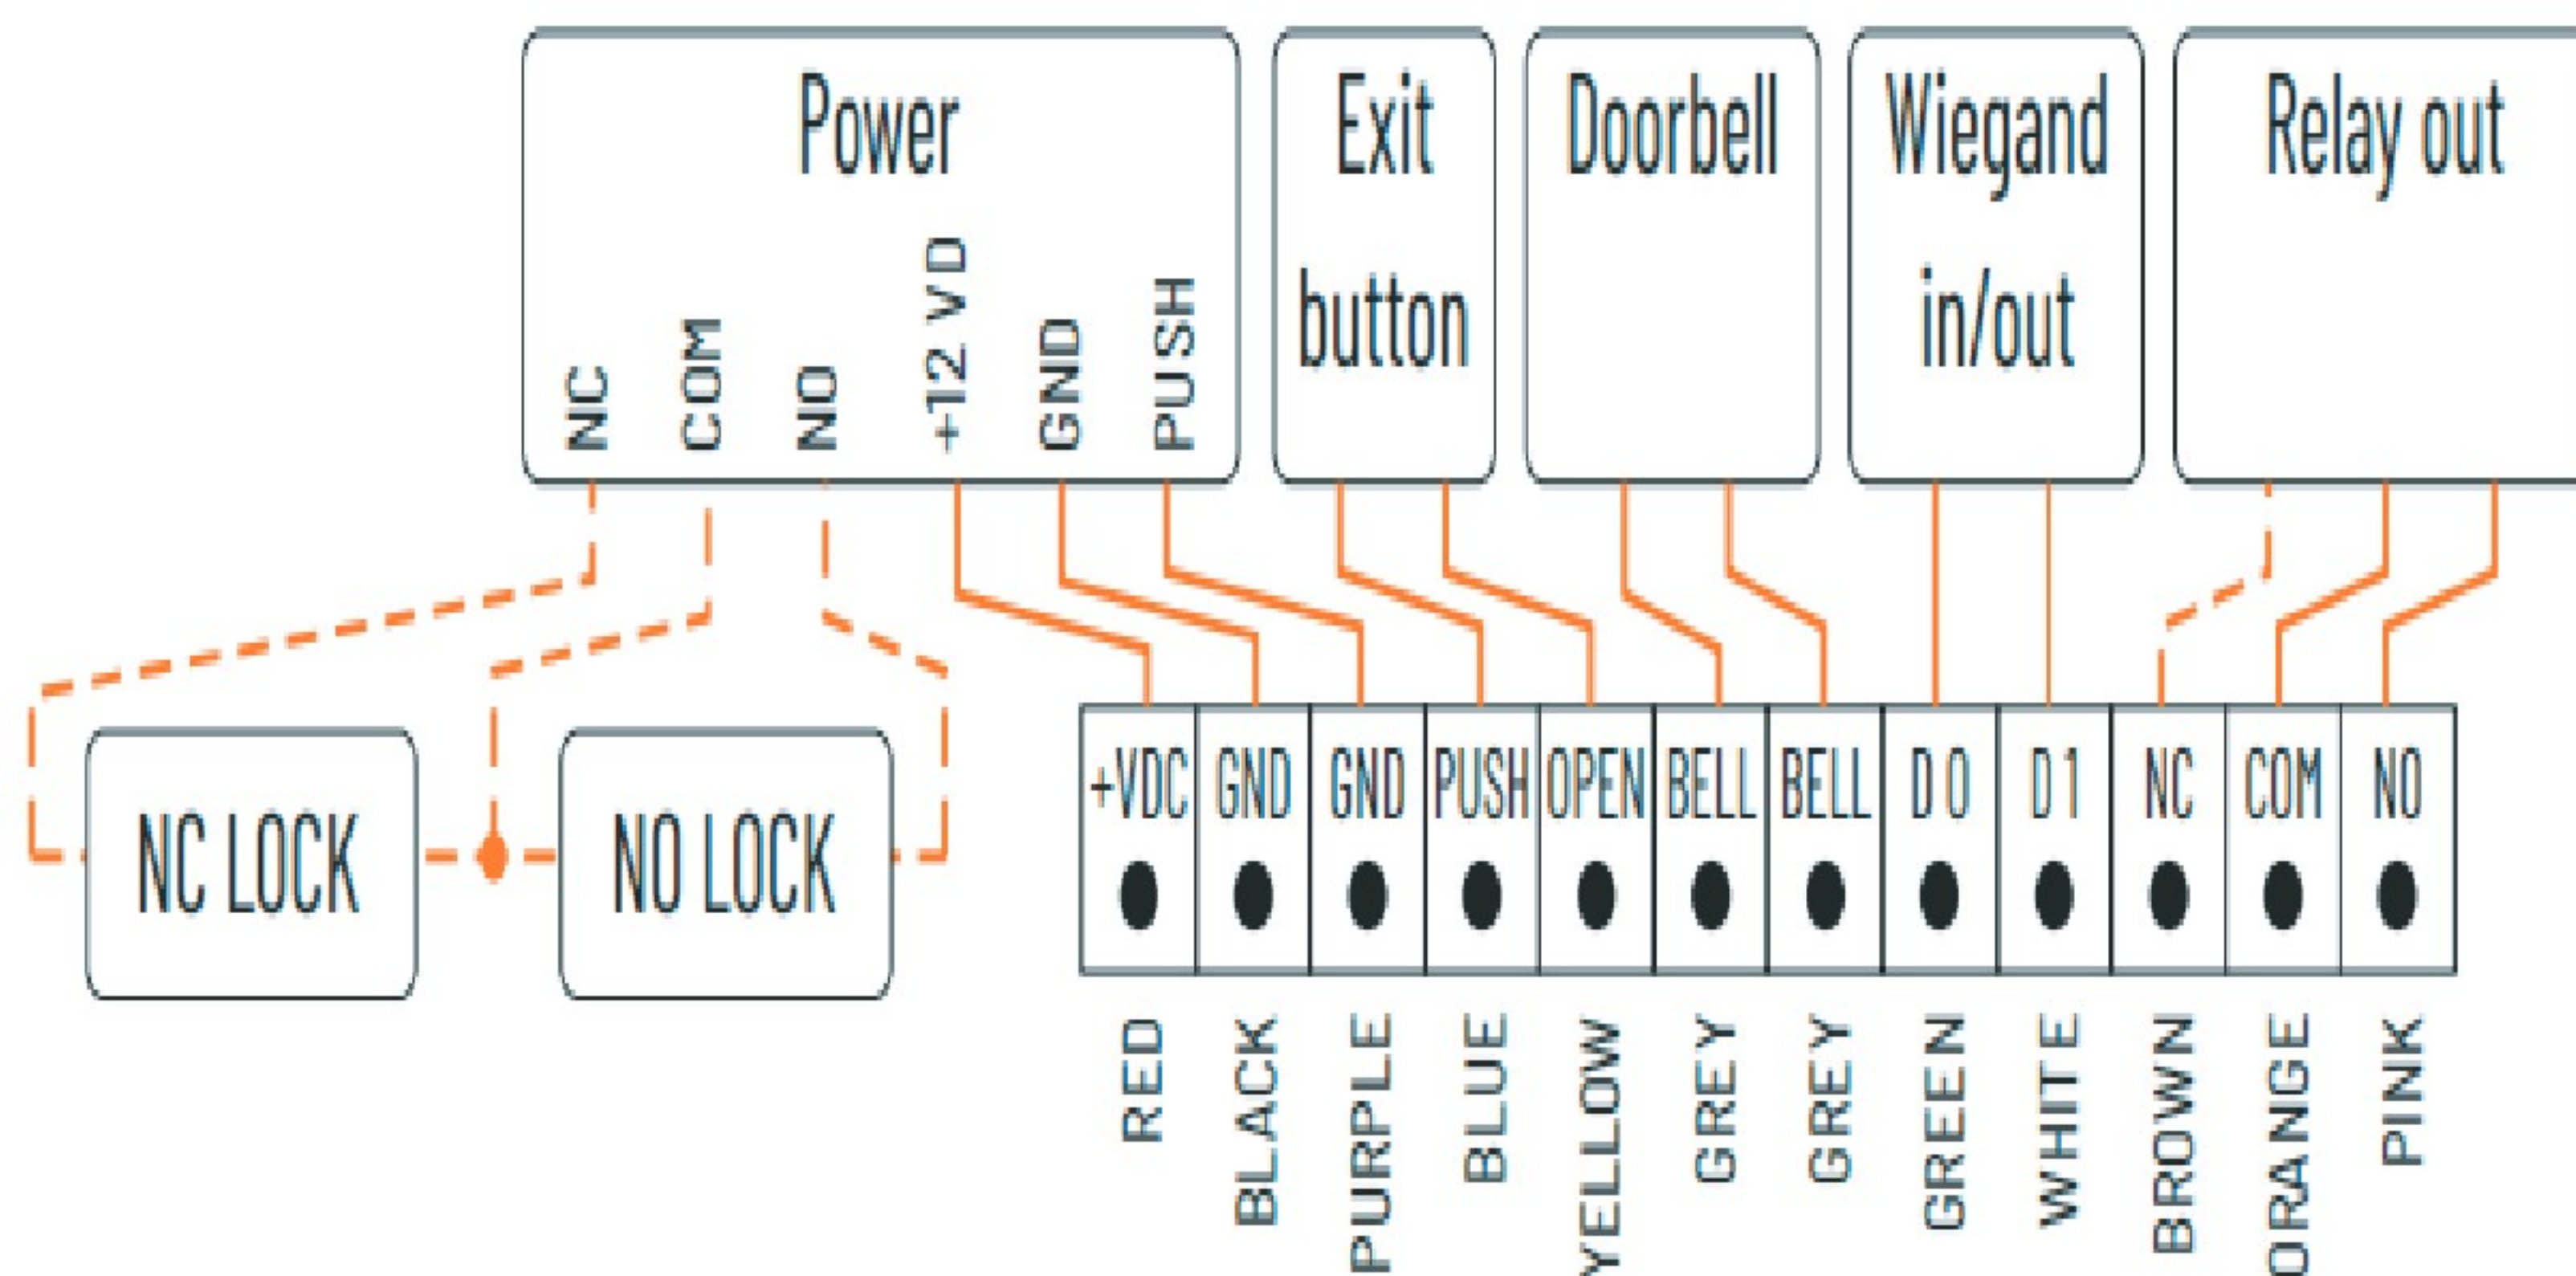

Configurations

